



Single direction thrust ball bearings


d 10 ~ (40) mm

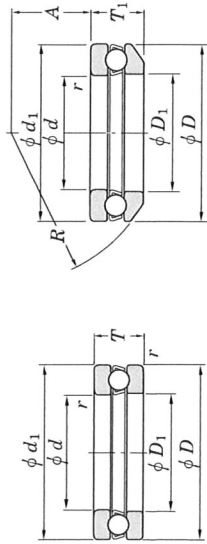


With flat back faces




With spherical back face



With aligning seat race



With aligning seat race



With aligning seat race

d	Boundary dimensions (mm)				Basic load ratings (kN)		Fatigue load limit (kN)		Limiting speeds (min ⁻¹)		Bearing No.		Dimensions (mm)						Mounting dimensions (mm)		(Refer.) Mass (kg)					
	D	T	T_1	T_2	C_a	C_{0a}	C_u	Grease lub.	Oil lub.	With flat back faces	With spherical back face	With aligning seat race	d_1 max.	D_1 min.	D_2	D_3	A	R	C	d_a min.	D_a max.	r_a max.	With flat back faces	With spherical back face	With aligning seat race	
10	24	9	—	—	12.5	14.0	0.630	6 500	10 000	51100	—	—	24	11	—	—	—	—	—	—	18	16	0.3	0.020	—	—
	26	11	11.6	13	15.8	17.1	0.770	5 700	8 800	51200	53200	53200U	26	12	18	28	8.5	22	3.5	20	16	0.6	0.030	0.029	0.037	
12	26	9	—	—	12.9	14.0	0.690	6 500	10 000	51101	—	—	26	13	—	—	—	—	—	—	20	18	0.3	0.022	—	—
	28	11	11.4	13	16.5	19.0	0.860	5 400	8 300	51201	53201	53201U	28	14	20	30	11.5	25	3.5	22	18	0.6	0.034	0.031	0.043	
15	28	9	—	—	13.2	15.4	0.760	6 100	9 400	51102	—	—	28	16	—	—	—	—	—	—	23	20	0.3	0.024	—	—
	32	12	13.3	15	20.8	24.8	1.10	4 900	7 500	51202	53202	53202U	32	17	24	35	12	28	4	25	22	0.6	0.046	0.048	0.062	
17	30	9	—	—	13.5	18.2	0.820	6 100	9 400	51103	—	—	30	18	—	—	—	—	—	—	25	22	0.3	0.028	—	—
	35	12	13.2	15	21.5	27.3	1.25	4 900	7 500	51203	53203	53203U	35	19	26	38	16	32	4	28	24	0.6	0.053	0.055	0.070	
20	35	10	—	—	17.8	24.7	1.10	5 100	7 900	51104	—	—	35	21	—	—	—	—	—	—	29	26	0.3	0.040	—	—
	40	14	14.7	17	27.9	37.7	1.70	3 900	6 000	51204	53204	53204U	40	22	30	42	18	36	5	32	28	0.6	0.082	0.080	0.100	
25	42	11	—	—	24.4	37.2	1.70	4 400	6 800	51105	—	—	42	26	—	—	—	—	—	—	35	32	0.6	0.059	—	—
	47	15	16.7	19	34.6	50.4	2.30	3 600	5 500	51205	53205	53205U	47	27	36	50	19	40	5.5	38	34	0.6	0.120	0.120	0.152	
30	52	18	19.8	22	44.7	61.4	2.75	3 100	4 800	51305	53305	53305U	52	27	38	55	21	45	6	41	36	1	0.180	0.180	0.224	
	60	24	26.4	29	69.5	89.4	4.05	2 600	4 000	51405	53405	53405U	60	27	42	62	19	50	8	46	39	1	0.340	0.350	0.442	
35	47	11	—	—	25.5	42.2	1.90	4 300	6 600	51106	—	—	47	32	—	—	—	—	—	—	40	37	0.6	0.068	—	—
	52	16	17.8	20	36.7	58.2	2.65	3 400	5 200	51206	53206	53206U	52	32	42	55	22	45	5.5	43	39	0.6	0.150	0.160	0.193	
40	60	21	22.6	25	53.5	78.7	3.55	2 700	4 200	51306	53306	53306U	60	32	45	62	22	50	7	48	42	1	0.270	0.270	0.326	
	70	28	30.1	33	91.0	126	5.70	2 200	3 400	51406	53406	53406U	70	32	50	75	20	56	9	54	46	1	0.530	0.530	0.660	
35	52	12	—	—	25.5	47.2	2.00	3 900	6 000	51107	—	—	52	37	—	—	—	—	—	—	45	42	0.6	0.090	—	—
	62	18	19.9	22	48.9	78.2	3.55	2 900	4 500	51207	53207	53207U	62	37	48	65	24	50	7	51	46	1	0.220	0.220	0.277	
40	68	24	25.6	28	69.3	105	4.75	2 400	3 700	51307	53307	53307U	68	37	52	72	24	56	7.5	55	48	1	0.390	0.400	0.484	
	80	32	34	37	109	155	7.00	1 900	2 900	51407	53407	53407U	80	37	58	85	23	64	10	62	53	1	0.790	0.790	0.960	
40	60	13	—	—	33.6	62.8	2.85	3 400	5 300	51108	—	—	60	42	—	—	—	—	—	—	52	48	0.6	0.120	—	—
	68	19	20.3	23	58.7	98.3	4.45	2 700	4 200	51208	53208	53208U	68	42	55	72	28.5	56	7	57	51	1	0.270	0.270	0.340	
40	78	26	28.5	31	86.6	135	6.05	2 100	3 300	51308	53308	53308U	78	42	60	82	28	64	8.5	63	55	1	0.550	0.570	0.690	

[Remark] Standard cage types used for the above bearings are described earlier in this section.